

200W Transient Voltage Suppressor



Description

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

Features

- Glass passivated or planar junction
- Excellent clamping capability
- Repetition rate (duty cycle): 0.01%
- Low profile package and low inductance
- 200W Peak Pulse power capability at 10×1000μs waveform.
- Fast response time: typically less than 1.0ps from 0V to $V_{BR\ min}$.
- High temperature soldering: 260°C/10s at terminals.
- Plastic package has Underwriters Laboratory Flammability 94V-0.
- For surface mounted applications in order to optimize board space.

Dimensions & Symbol (Unit: mm Max)




Mechanical Characteristics

- Package: SMF/SOD-123FL
- Case Material: "Green" MoldingCompound.
- UL Flammability Classification Rating 94V-0
- Device meets MSL 1,per J-STD-020
- Polarity: Color band denotes cathode except bi-directional models
- Standard Packaging: 12mm tape (EIA STD RS-481)
- Weight: 0.017g
- Terminal Connections: See Diagram Below

Applications

- I/O Interface.
- AC/DC Power supply
- Low frequency signal transmission line (RS232, RS485, etc.)

Marking Information

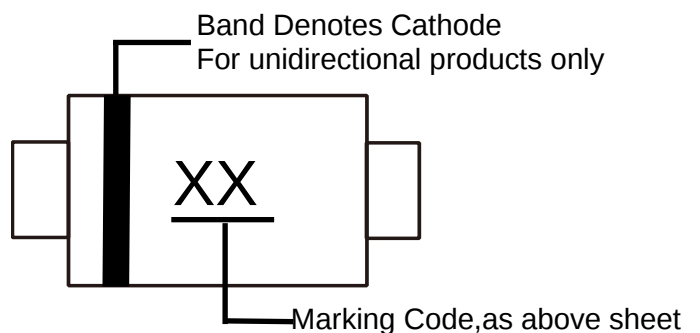

Ordering Information

Out line	Reel (pcs)	Reel diameters
Taping	3K	7inch

Electrical Characteristics (T =25℃)

Part Number		Marking		V _R	I _R @V _R	V _{BR} @I _T		I _T	V _C @I _{PP}	I _{PP} ^①
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMF5.0A	SMF5.0CA	5.0A	5.0CA	5.0	400	6.40	7.00	10	9.2	21.70
SMF6.0A	SMF6.0CA	6.0A	6.0CA	6.0	400	6.67	7.37	10	10.3	19.40
SMF 6.5A	SMF6.5CA	6.5A	6.5CA	6.5	250	7.22	7.98	10	11.2	17.90
SMF7.0 A	SMF7.0CA	7.0A	7.0CA	7.0	100	7.78	8.60	10	12.0	16.70
SMF 7.5A	SMF7.5CA	7.5A	7.5CA	7.5	50	8.33	9.21	1	12.9	15.50
SMF 8.0A	SMF8.0CA	8.0A	8.0CA	8.0	25	8.89	9.83	1	13.6	14.70
SMF8.5 A	SMF8.5CA	8.5A	8.5CA	8.5	10	9.44	10.40	1	14.4	13.90
SMF9.0 A	SMF9.0CA	9.0A	9.0CA	9.0	5	10.00	11.10	1	15.4	13.00
SMF10A	SMF10CA	10A	10CA	10.0	2.5	11.10	12.30	1	17.0	11.80
SMF11A	SMF11CA	11A	11CA	11.0	2.5	12.20	13.50	1	18.2	11.00
SMF12A	SMF12CA	12A	12CA	12.0	2.5	13.30	14.70	1	19.9	10.10
SMF13A	SMF13CA	13A	13CA	13.0	1	14.40	15.90	1	21.5	9.30
SMF14A	SMF14CA	14A	14CA	14.0	1	15.60	17.20	1	23.2	8.6
SMF15A	SMF15CA	15A	15CA	15.0	1	16.70	18.50	1	24.4	8.2
SMF16A	SMF16CA	16A	16CA	16.0	1	17.80	19.70	1	26.0	7.7
SMF17A	SMF17CA	17A	17CA	17.0	1	18.90	20.90	1	27.6	7.2
SMF18A	SMF18CA	18A	18CA	18.0	1	20.00	22.10	1	29.2	6.8
SMF20A	SMF20CA	20A	20CA	20.0	1	22.20	24.50	1	32.4	6.2
SMF22A	SMF22CA	22A	22CA	22.0	1	24.40	26.90	1	35.5	5.6
SMF24A	SMF24CA	24A	24CA	24.0	1	26.70	29.50	1	38.9	5.1
SMF26A	SMF26CA	26A	26CA	26.0	1	28.90	31.90	1	42.1	4.8
SMF28A	SMF28CA	28A	28CA	28.0	1	31.10	34.40	1	45.4	4.4
SMF30A	SMF30CA	30A	30CA	30.0	1	33.30	36.80	1	48.4	4.1
SMF33A	SMF33CA	33A	33CA	33.0	1	36.70	40.60	1	53.3	3.8
SMF36A	SMF36CA	36A	36CA	36.0	1	40.00	44.20	1	58.1	3.4
SMF40A	SMF40CA	40A	40CA	40.0	1	44.40	49.10	1	64.5	3.1
SMF43A	SMF43CA	43A	43CA	43.0	1	47.8	52.80	1	69.4	2.9
SMF45A	SMF45CA	45A	45CA	45.0	1	50.00	55.30	1	72.7	2.8
SMF48A	SMF48CA	48A	48CA	48.0	1	53.30	58.90	1	77.4	2.6
SMF51A	SMF51CA	51A	51CA	51.0	1	56.70	62.70	1	82.4	2.4

Electrical Characteristics (T =25°C)

Part Number		Marking		V _R	I _R @V _R	V _{BR} @I _T		I _T	V _C @I _{PP}	I _{PP} ^①
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMF54A	SMF54CA	54A	54CA	54.0	1	60.00	66.30	1	87.1	2.3
SMF58A	SMF58CA	58A	58CA	58.0	1	64.4	71.20	1	93.6	2.1
SMF60A	SMF60CA	60A	60CA	60.0	1	66.7	73.70	1	96.8	2.1
SMF64A	SMF64CA	64A	64CA	64.0	1	71.10	78.60	1	103.0	1.9
SMF70A	SMF70CA	70A	70CA	70.0	1	77.8	86.00	1	113.0	1.7
SMF75A	SMF75CA	75A	75CA	75.0	1	83.3	92.10	1	121.0	1.6
SMF78A	SMF78CA	78A	78CA	78.0	1	86.70	95.8	1	126.0	1.6
SMF85A	SMF85CA	85A	85CA	85.0	1	94.40	104.0	1	137.0	1.5
SMF90A	SMF90CA	90A	90CA	90.0	1	100.0	111.0	1	146.0	1.2
SMF100A	SMF100CA	100A	100CA	100.0	1	111.0	123.0	1	162.0	1.1
SMF110A	SMF110CA	110A	110CA	110.0	1	122.0	135.0	1	177.0	1.1
SMF120A	SMF120CA	120A	120CA	120.0	1	133.0	147.0	1	193.0	1.0
SMF130A	SMF130CA	130A	130CA	130.0	1	144.0	159.0	1	209.0	1.0
SMF150A	SMF150CA	150A	150CA	150.0	1	167.0	185.0	1	243.0	0.8
SMF160A	SMF160CA	160A	160CA	160.0	1	178.0	197.00	1	259.0	0.8
SMF170A	SMF170CA	170A	170CA	170.0	1	189.0	209.0	1	275.0	0.7
SMF180A	SMF180CA	180A	180CA	180.0	1	201.0	222.0	1	292.0	0.7
SMF188A	SMF188CA	188A	188CA	188.0	1	209.0	231.0	1	304.0	0.7
SMF200A	SMF200CA	200A	200CA	200.0	1	224.0	247.0	1	324.0	0.6
SMF220A	SMF220CA	220A	220CA	220.0	1	246.0	272.0	1	356.0	0.6
SMF250A	SMF250CA	250A	250CA	250.0	1	279.0	309.0	1	405.0	0.5

① Surge waveform: 10/1000μs

V_R : Stand-off Voltage -- Maximum voltage that can

be applied V_{BR}: Breakdown Voltage

V_C: Clamping Voltage -- Peak voltage measured across the suppressor at a specified I_{pp}

I_R: Reverse Leakage Current

Absolute Maximum Ratings(T=25°C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage temperature range	T_{stg}	-55 to +150	°C
Operating junction temperature range	T_j	-55 to +150	°C
Steady state power dissipation at $T_L=75^{\circ}\text{C}$	$P_{M(AV)}$	2.8	W
Peak pulse power dissipation on 10/1000 μs waveform	P_{PP}	200	W
Maximum Instantaneous Forward Voltage at 30A for Unidirectional	V_F	5.0	V

Ratings And V-I Characteristics Curves (T=25°C, unless otherwise noted)

FIG.1:V- I curve characteristics (Uni-directional)


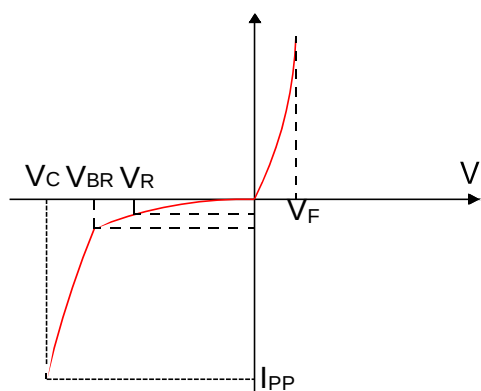


FIG.2:V- I curve characteristics (Bi-directional)

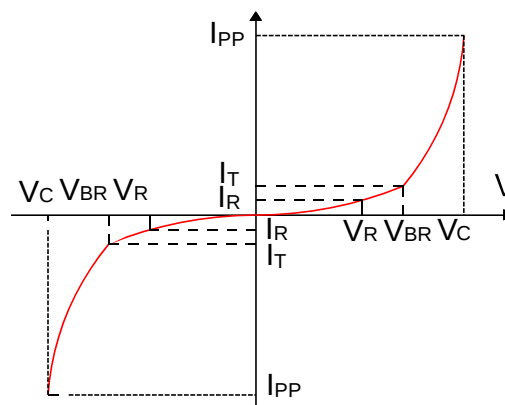

Typical Characteristics

Figure 1: Peak Pulse Power Rating Curve

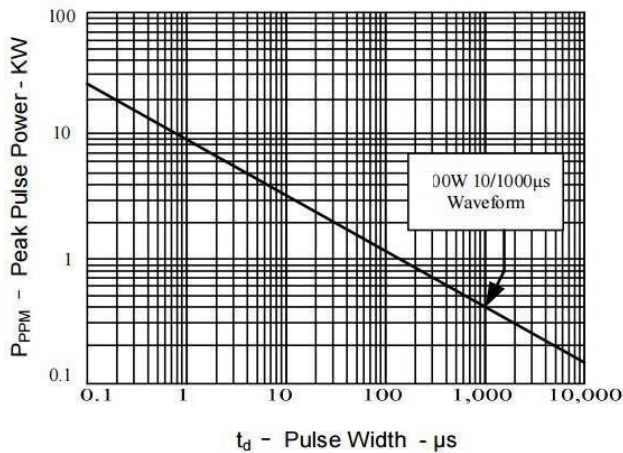


Figure 2: Pulse Derating Curve

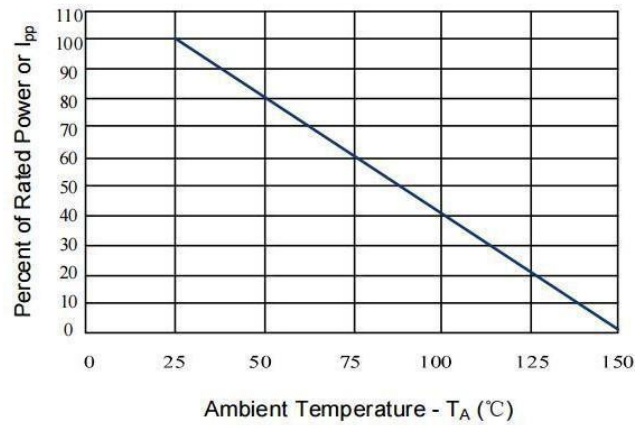


Figure 3: Pulse Waveform

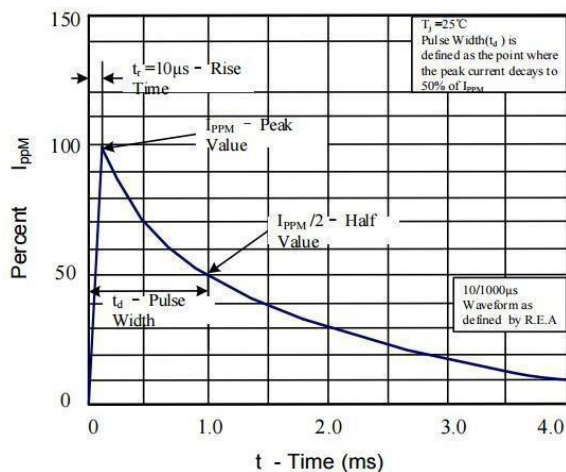


Figure 4: Typical Junction Capacitance

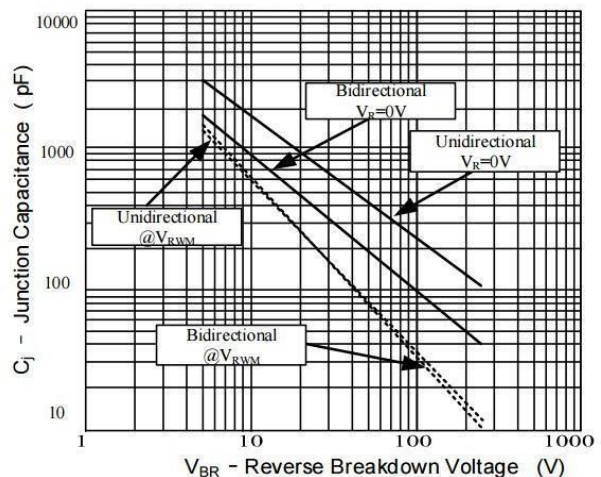


Figure 5: Steady State Power Dissipation Derating Curve



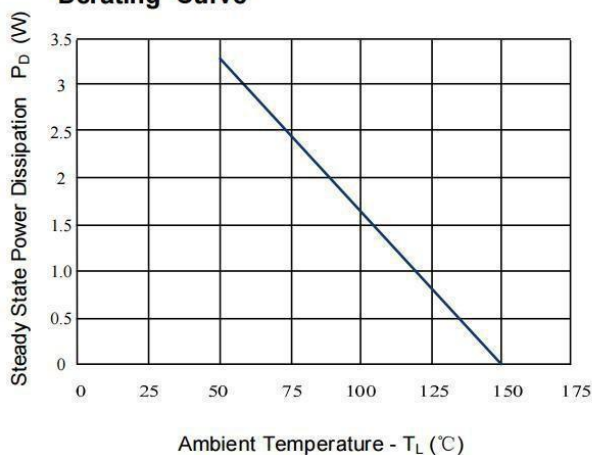


Figure 6: Maximum Non-Repetitive Forward Surge Current Only Unidirectional

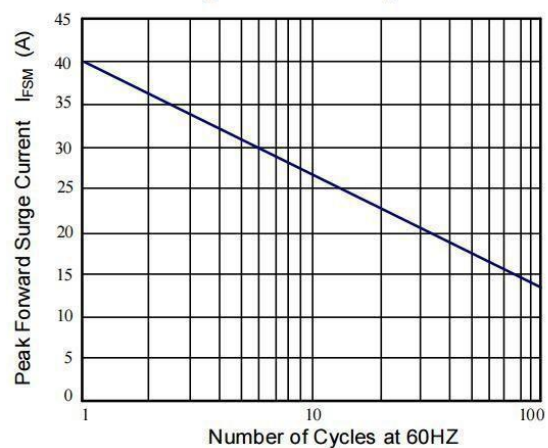


SOD-123FL Package Outline Drawing

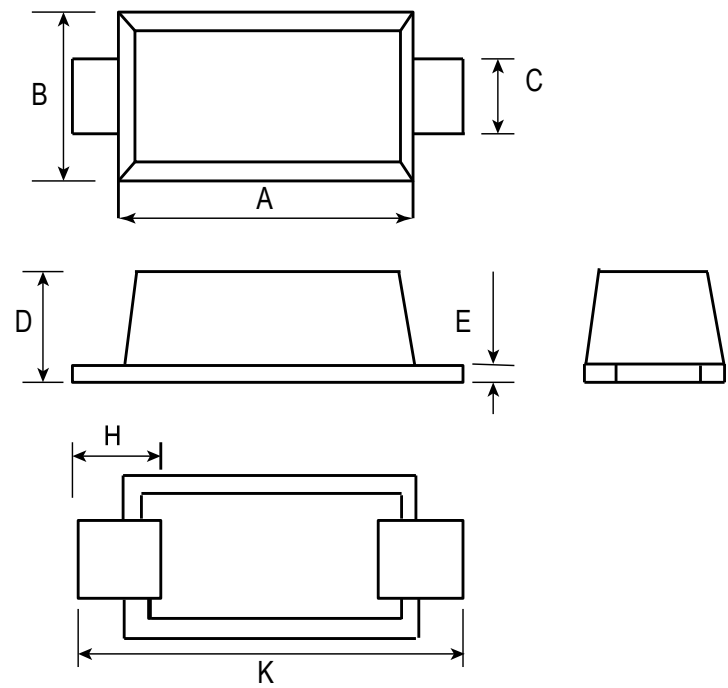

DIM	Millimeters		
	Min	Nom	Max
A	2.60	2.80	3.00
B	1.60	1.80	2.00
C	0.80	1.00	1.20
D	0.9		1.30
E	0.10	0.20	0.30
H	0.35		0.85
K	3.50		4.00


Suggested Land Pattern

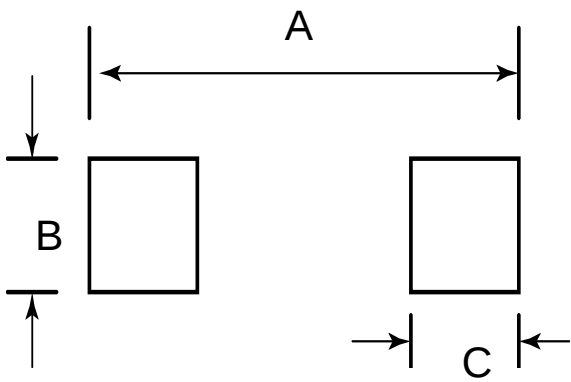



SYM	DIMENSIONS	
	MILLIMETERS	INCHES
A	4.19	0.165
B	1.20	0.048
C	0.90	0.036

TAPE AND REEL INFORMATION

Reel Dimensions

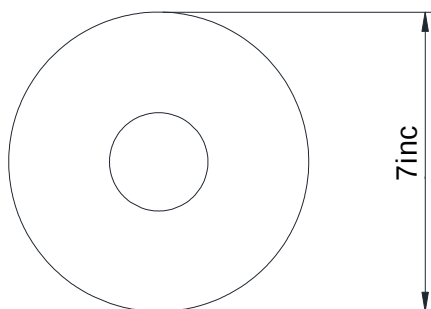


Tape Dimensions

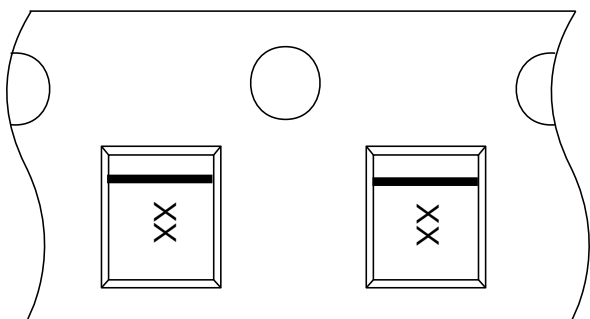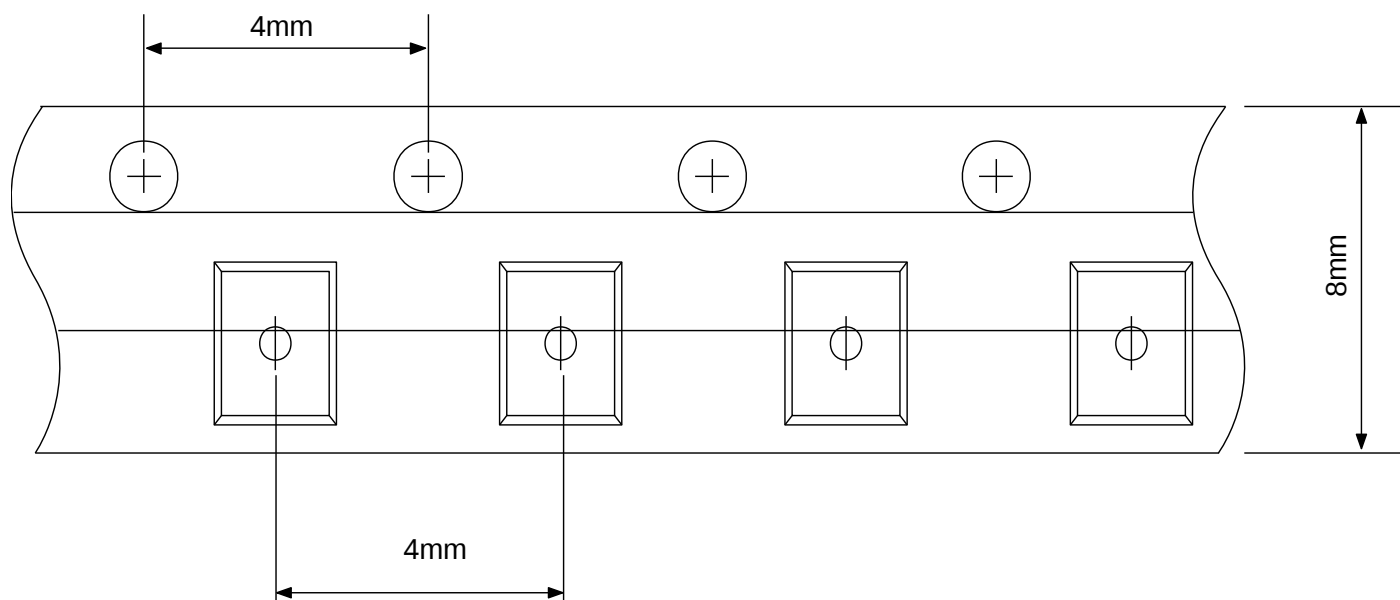

Marking For Uni-Polar

or

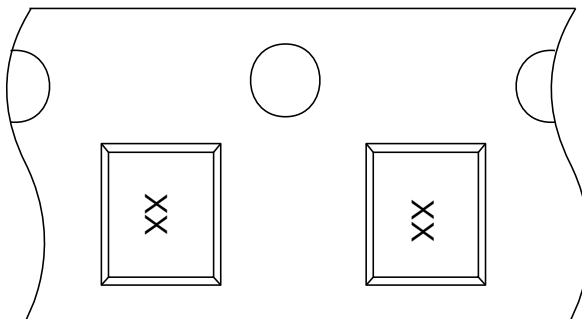

Marking For Bi-Polar



User Direction of Feed

IMPORTANT NOTICE

The information given in this document is believed to be accurate and reliable but shall in no event be regarded as a guarantee of conditions or characteristics. PN-Silicon assumes no responsibility for any errors in this document, or for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of PN-Silicon.

The product listed in this document are designed to be used with ordinary electronic equipment or devices and are not authorized to used with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, automotive and other safety device.)

The  logo is a registered trademark of PN-Silicon co., ltd which reserves the right to make changes to the product or this document at any time without notice. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. PN-Silicon makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. All rights reserved.