

Dual N-Channel, 12V, 10A, DFN2x3-6L, Power MOSFET

MOSFET Product Summary

V_{DS}	$R_{DS(ON)}$ (Typ.)	I_D
12V	8.6mΩ @ $V_{GS}=4.5V$	10A
	9.0mΩ @ $V_{GS}=4.0V$	
	9.3mΩ @ $V_{GS}=3.8V$	
	10.5mΩ @ $V_{GS}=3.1V$	
	13mΩ @ $V_{GS}=2.5V$	


Description

The PM2007B is dual N-Channel enhancement MOSFET, which uses advanced trench technology and designs to provide excellent $R_{DS(ON)}$ with low gate charge. This device is suitable for use in general purpose applications.

Features

- Low Gate Charge and $R_{DS(ON)}$
- RoHS Product
- High Density Cell Design for Ultra Low $R_{DS(ON)}$

Dimensions and Pin Configuration

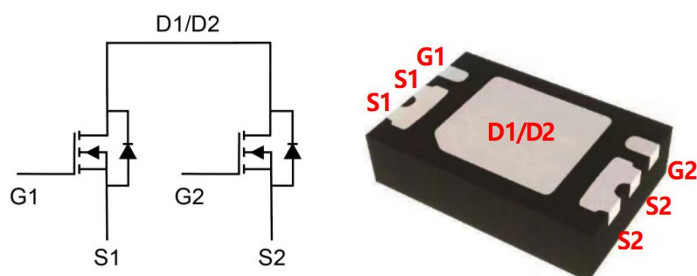

Circuit diagram

Bottom View


Mechanical Characteristics

- Package: DFN2*3-6L
- Case Material: "Green" Molding Compound
- Marking Information: See Below

Applications

- Load Switching
- PWM
- DC-DC converter
- High Frequency Switching

Marking Information

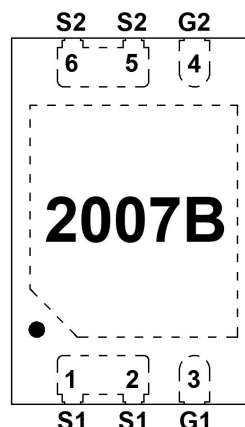

2007B = Device Marking Code

Ordering Information

Part Number	Shipping	Reel Size
PM2007B	3000/Tape & Reel	7 inch

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	12	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	10	A
Pulsed Drain Current ^(Note1)	I_{DM}	56	A
Power Dissipation ^(Note2)	P_D	1.52	W
Thermal Resistance from Junction to Ambient ^(Note3)	$R_{\theta JA}$	82	$^{\circ}\text{C/W}$
Junction Temperature	T_J	$-55 \sim +150$	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	$-55 \sim +150$	$^{\circ}\text{C}$

Notes:


1. $P_W \leq 10\mu\text{s}$, Duty Cycle $\leq 1\%$. Pulse width limited by maximum junction temperature.
2. Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
3. The value of $R_{\theta JA}$, which is steady state, is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, with $T_A = 25^{\circ}\text{C}$.

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-to-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0\text{V}$, $I_D=250\mu\text{A}$	12	-	-	V
Zero Gate voltage Drain Current	I_{DSS}	$V_{DS}=12\text{V}$, $V_{GS}=0\text{V}$	-	-	1	μA
Gate-to-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 12\text{V}$, $V_{DS}=0\text{V}$	-	-	± 100	nA
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$	0.4	0.65	1.0	V

Drain-to-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=4.5V, I_D=3A$	-	8.6	15.6	mΩ
		$V_{GS}=4.0V, I_D=3A$	-	9.0	16.5	
		$V_{GS}=3.8V, I_D=3A$	-	9.3	17	
		$V_{GS}=3.1V, I_D=3A$	-	10.5	19	
		$V_{GS}=2.5V, I_D=3A$	-	13	22	
Diode Forward Voltage	V_{SD}	$I_S=10A, V_{GS}=0V$	-	0.88	1.25	V
Dynamic Characteristics						
Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=6V,$ $f=1MHz$	-	661	-	pF
Output Capacitance	C_{oss}		-	139	-	
Reverse Transfer Capacitance	C_{rss}		-	126	-	
Switching Characteristics						
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=5V, V_{DS}=6V,$ $R_L=1.35\Omega, R_G=3\Omega$	-	5.6	-	ns
Turn-On Rise Time	t_r		-	11	-	
Turn-Off Delay Time	$t_{d(off)}$		-	49	-	
Turn-Off Fall Time	t_f		-	13	-	
Gate Total Charge	Q_g	$V_{GS}=4.5V, V_{DS}=6V,$ $I_{DS}=5A$	-	13	-	nC
Gate-Source Charge	Q_{gs}		-	0.7	-	
Gate-Drain Charge	Q_{gd}		-	2.8	-	


Typical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

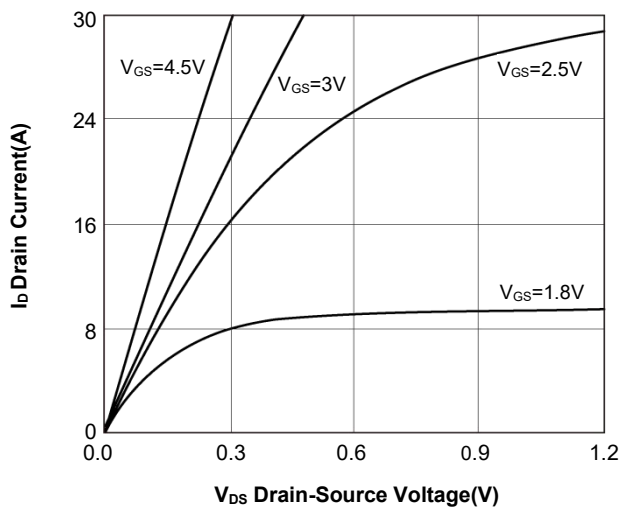


Drain Current vs. Drain-Source Voltage

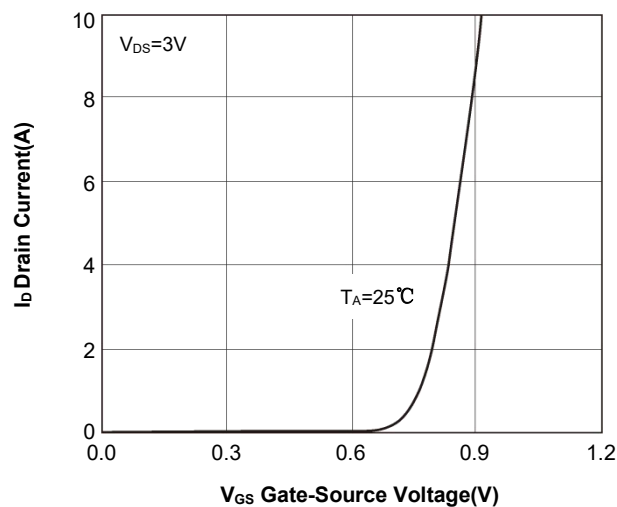


Drain Current vs. Gate-Source Voltage

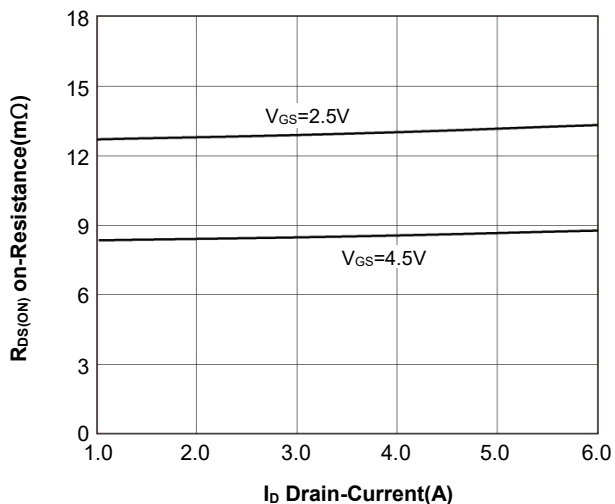


$R_{DS(ON)}$ On-Resistance vs. Drain-Current

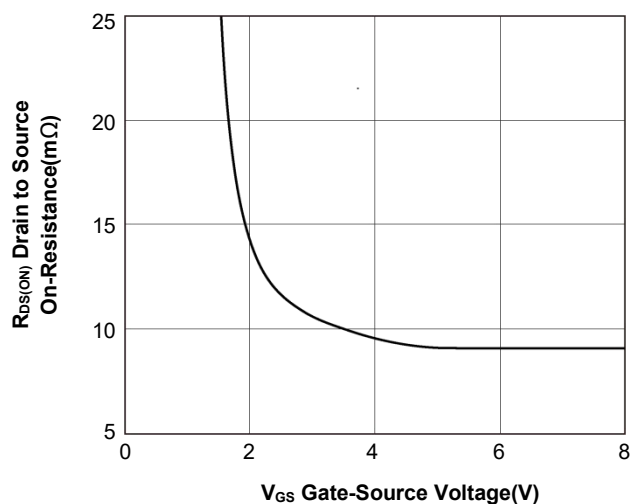

On-Resistance vs. Gate-Source Voltage

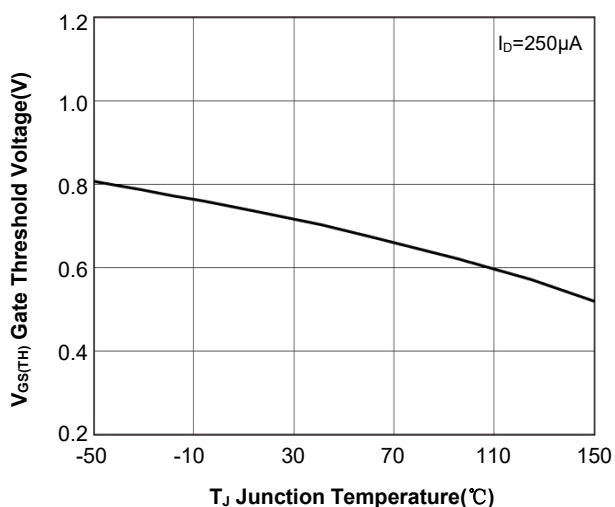


Gate Threshold Voltage vs. Temperature

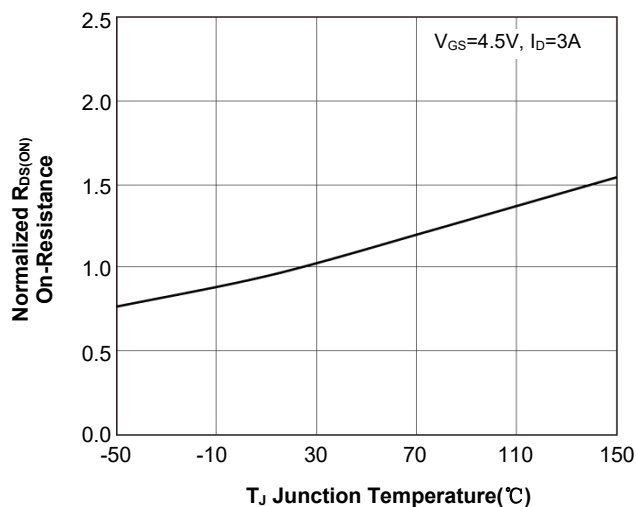


On-Resistance vs. Temperature

DFN2*3-6L Package Outline Drawing

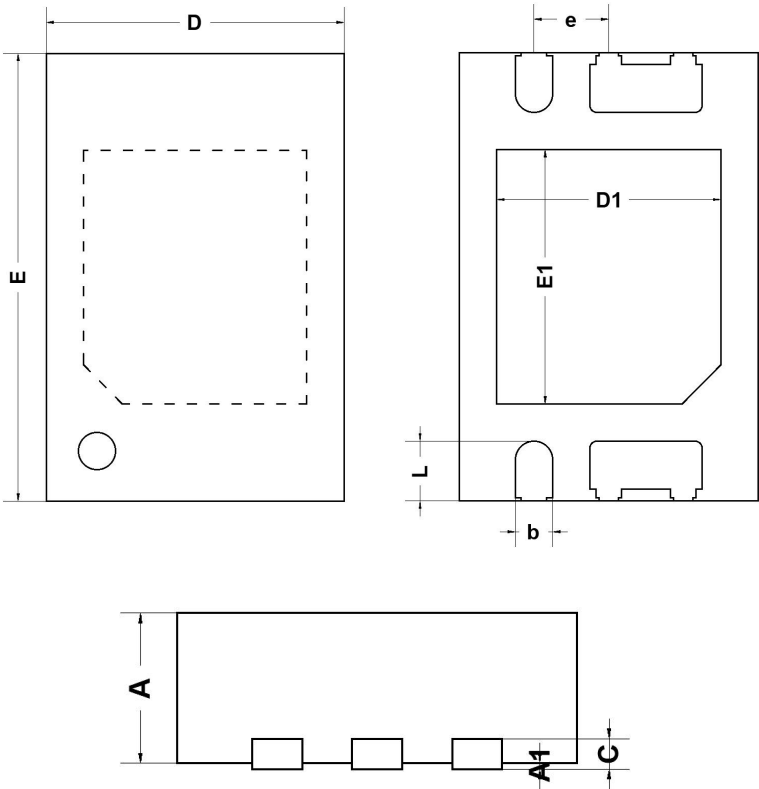


Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.70	0.75	0.80
A1	0.00	0.03	0.05
b	0.20	0.25	0.30
C	0.152 TYP		
D	1.95	2.00	2.05
e	0.50 BSC		
E	2.95	3.00	3.05
E1	1.60	1.70	1.80
D1	1.40	1.50	1.60
L	0.35	0.40	0.45

Suggested Land Pattern (Unit: mm)


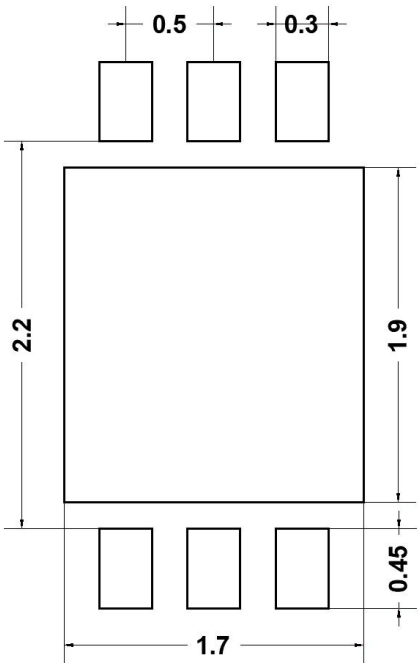


TAPE AND REEL INFORMATION

Reel Dimensions

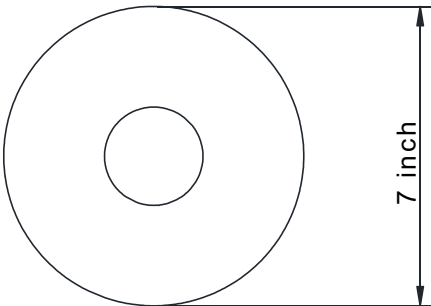

Tape Dimensions

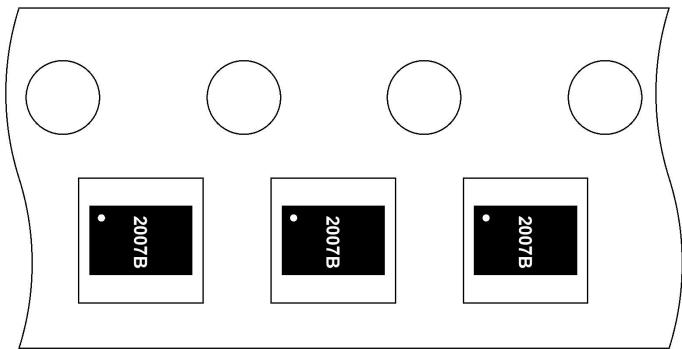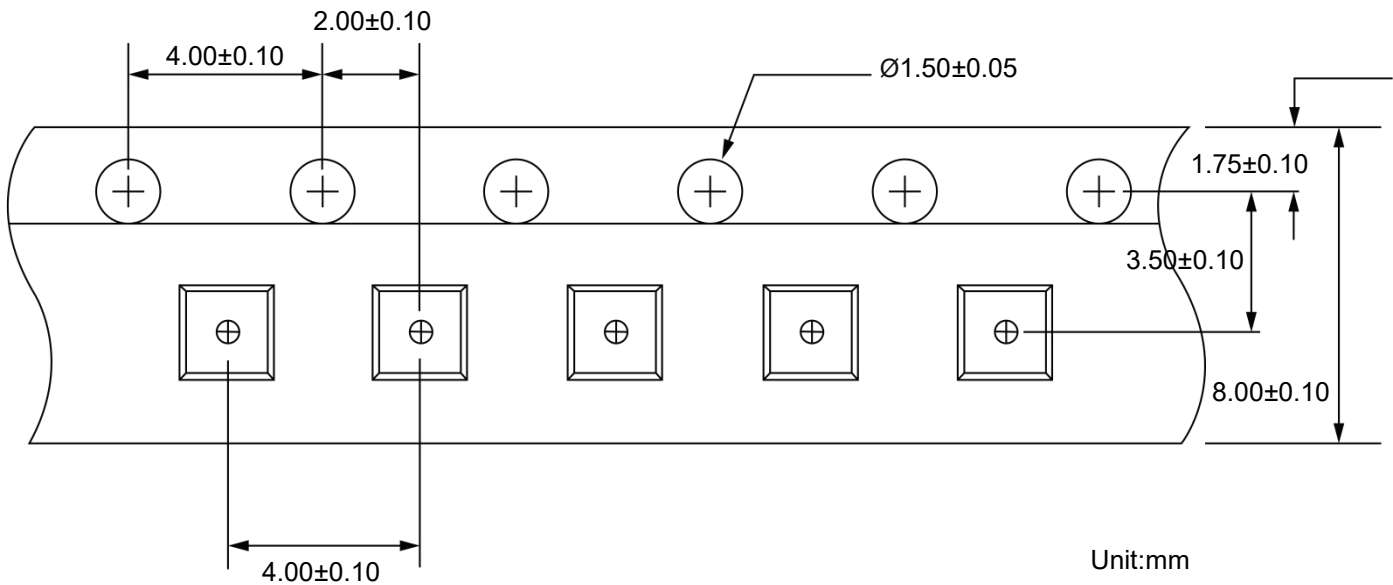

User Direction of Feed

IMPORTANT NOTICE

The information given in this document is believed to be accurate and reliable but shall in no event be regarded as a guarantee of conditions or characteristics. PN-Silicon assumes no responsibility for any errors in this document, or for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of PN-Silicon.

The product listed in this document are designed to be used with ordinary electronic equipment or devices and are not authorized to used with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, automotive and other safety device.)

The  logo is a registered trademark of PN-Silicon co., ltd which reserves the right to make changes to the product or this document at any time without notice. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. PN-Silicon makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. All rights reserved.